



WEVER & DUCRÉ
LIGHTING

CLEA WALL 2.0

181584FJ3

Project

Type

Notes

Quantity

Date

GENERAL

Wall , Surface

Feel Jade

similar to NCS S 2005 – G90Y^a

IP20

Interior

Output: 615 lm

CIE flux code: 13 38 68 50 100

LED

2700 K

CRI ≥ 90

L80 / 50000 h

2 SDCM

OPTICAL

Opal ,

ELECTRICAL

phase-cut dim

220 - 240 V

Total connected power 9.9 W

Class 1



PHYSICAL

Diameter 500 mm


Height 134 mm

1.31 kg

^a Color may deviate slightly due to production conditions.

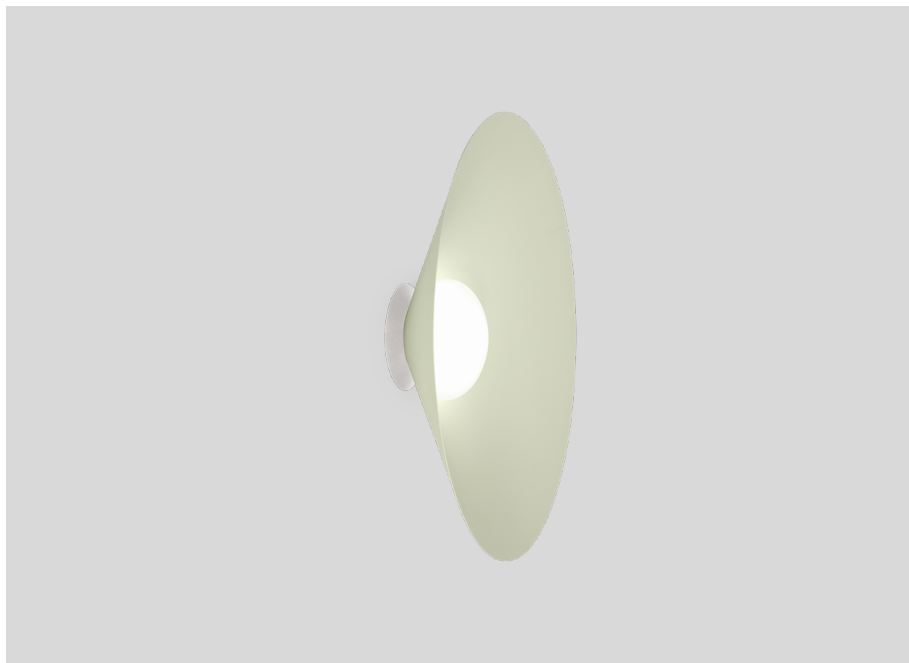

Round shape wall surface mounted luminaire with diffuse light; aluminium base in White Matt wet painted; matt texture; steel diffuser; surface Feel Jade wet painted; matt texture; similar to NCSS 2005 – G90Y; white opal glass handblown; with COB (Chip on Board) technology for maximum efficiency; phase-cut dim; light colour 2700 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; CRI (Colour Rendering Index) ≥ 90; degree of protection IP20; PC1; driver included; light source replaceable by an authorized professional; control gear replaceable by end-user;




CLEA

WALL 2.0

181584FJ3

LIGHT DISTRIBUTION



Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.96	0.92	0.88	0.85	0.81
LSF	1	1	1	1	1

MF	$LMF \times RSMF \times LLMF \times LSF$		RSMF ^a	Room Surface Maintenance Factor
MF	Maintenance Factor		LLMF	Lamp Lumens Maintenance Factor
LMF ^a	Luminaire Maintenance Factor		LSF	Lamp Survival Faktor

^a According to “CIE 97, Maintenance of indoor electric lighting systems”, 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.