



WEVER & DUCRÉ  
LIGHTING

# DARF WALL 1.2

2563T8B5

Project	
Type	
Notes	
Quantity	
Date	

## GENERAL

Wall , Surface  
 Black Matt  
 RAL 9011<sup>a</sup>  
 IP20  
 Interior  
 Output: 2940 lm  
 CIE flux code: 40 70 89 90 100

## LED

3000 K  
 CRI ≥ 90

## ELECTRICAL

phase-cut dim  
 220 - 240 V  
 LED Inset 23.0 W  
 Class 2


## PHYSICAL

Length 33 mm  
 Width 1626 mm  
 Height 33 mm  
 0.33 kg  
 cable plug with switch


<sup>a</sup> Color may deviate slightly due to production conditions.



Tubular wall surface luminaire made from aluminium; surface Black Matt; powder coated; matt texture; RAL 9011; cable plug with switch in black; phase-cut dim; light colour 3000 K; CRI ≥ 90; 220 - 240 V; degree of protection IP20; PC2; light source replaceable by an authorized professional;

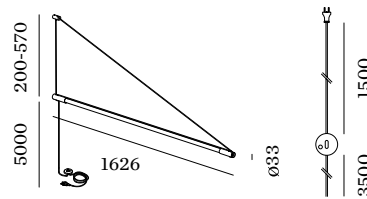

## LIGHT DISTRIBUTION



[2563T8B5] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BV apply.  
© Wever & Ducré BV · Spinnerijstraat 99/21 · 8500 Kortrijk · Belgium · www.weverducre.com



WEVER & DUCRÉ  
LIGHTING

# DARF WALL 1.2

2563T8B5