



WEVER & DUCRÉ
LIGHTING

PIRRO OPAL 2.0

151284J5

Project

Type

Notes

Quantity

Date

GENERAL

Ceiling, Surface

White Matt + Gold

RAL 9003^a

IP20

Interior

Output: 260 lm

CIE flux code: 65 94 100 100 100

LED

3000 K

CRI ≥ 90

3 SDCM

OPTICAL

Opal,

ELECTRICAL

phase-cut dim

220 - 240 V

Total connected power 6.7 W

Class 1

PHYSICAL


Length 94 mm

Width 50 mm


Height 65 mm

0.3 kg


^a Color may deviate slightly due to production conditions.

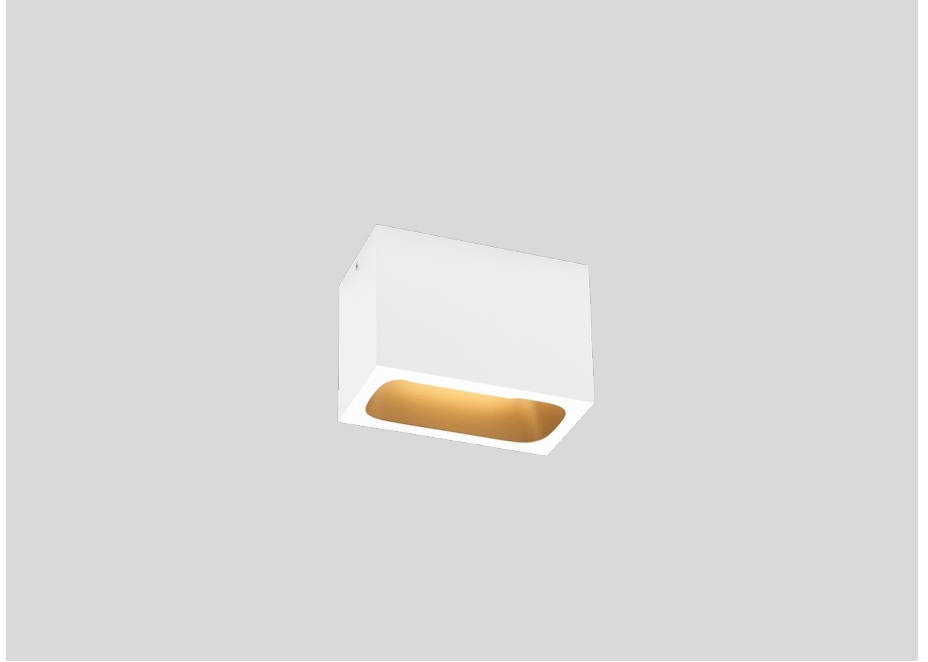

Rectangular ceiling surface mounted downlight made from die-cast aluminium with opal PMMA cover; surface housing White Matt powder coated; matt texture; with aesthetic frame in Gold wet painted; matt smooth; PCB 3-step binning; phase-cut dim; light colour 3000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90 ; CRI (Colour Rendering Index) ≥ 90 ; degree of protection IP20; PC1; driver included; light source replaceable by an authorized professional; control gear replaceable by end-user;



LIGHT DISTRIBUTION





WEVER & DUCRÉ
LIGHTING

PIRRO OPAL 2.0

151284J5

MOUNTING

1.0 CEILING BASE

TYPE	COLOUR	L · W · H (MM)	ORDERCODE
PIRRO SYSTEM	White	754·51·12	9 0 0 5 2 0 7 2
PIRRO SYSTEM	Black	754·51·12	9 0 0 5 2 0 7 3
PIRRO SYSTEM	Gold	754·51·12	9 0 0 5 2 0 7 4

2.0 CEILING BASE

TYPE	COLOUR	L · W · H (MM)	ORDERCODE
PIRRO SYSTEM	White	1150·51·12	9 0 0 5 2 0 7 5
PIRRO SYSTEM	Black	1150·51·12	9 0 0 5 2 0 7 6
PIRRO SYSTEM	Gold	1150·51·12	9 0 0 5 2 0 7 7