



Caprice ø520mm

Ceiling fixture Caprice ø520mm LED 39.6 SW 2700-3000-4000K PHASE CUT Gold 3072lm

Technical features

- Luminaire total power: 39.6W
- Real lumens: 3072 (3000K)
- Real lm/W: 78
- Correlated Colour Temperature (CCT): SW 2700-3000-4000K
- Lens / reflector angle: HORIZONTAL 114°
- Structure material: Steel
- Structure finish: Gold
- Diffuser material: Acrylic
- Diffuser finish: White
- Voltage / frequency: 220-240V/50-60Hz
- Dimming protocol: PHASE CUT
- Power Factor: 0.92
- Useful life: 50,000h L80B20
- Warranty: 5 años



Luminotechnic features

- CRI: 90
- MacAdam steps: 5
- Photobiological risk: RGO

UGR		Lampholder	Quantity	Light source power (W)
S=0.250				
Ceiling / cavity	0.7	LED	1	36W
Walls	0.5			
Working Plane	0.2			
Room dimensions	X=4H, Y=8H			
UGR crosswise	22.1			
UGR lengthwise	21.9			

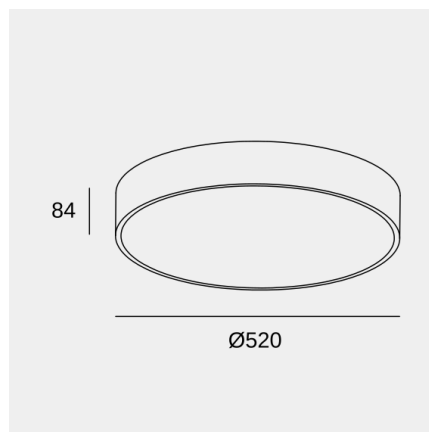


Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.



Caprice ø520mm

Ceiling fixture Caprice ø520mm LED 39.6 SW 2700-3000-4000K PHASE CUT Gold 3072lm

Logistics



x 3

Net weight (kg): 2.78

Packaged weight (kg): 4.55

Packaging: 575mm x 105mm x 575mm


Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.



Caprice ø520mm

Ceiling fixture Caprice ø520mm LED 39.6 SW 2700-3000-4000K PHASE CUT Gold 3072lm

Optional accessories



71-6196-14-14

White suspension kit

Structure material: Steel
Dimensions: Ø85 x NA x 20
Net weight (kg): 0.3

Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.